


Water Management Technologies
 P.O. Box 66125 Baton Rouge, LA USA 70896
 (225) 755-0026 Fax (225) 755-0995
 Web: www.w-m-t.com

SUBMERSIBLE PUMPS

Features

- High pumping efficiency at low head applications.
- Low Power consumption (200 watts).
- Three times the water flow as a centrifugal pump.
- Less wear and longer life with 4 pole submersible motor.
- Double mechanical seal ensures a perfect waterproof seal.
- Easily carried by one person, simple operation.
- The pump impeller is housed in the pump base ensuring maximum possible continuous operation at low water levels.

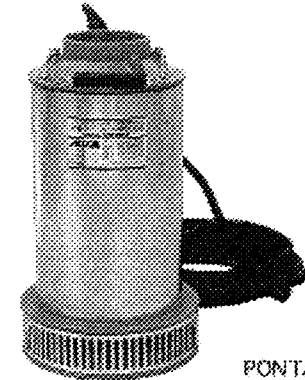

PONTA P1

■ SPECIFICATIONS

power cord length:10m

MODEL	SIZE	OUTPUT	VOLTAGE	RATED HEAD	RATED CAPACITY	MAX HEAD	MAX. CAPACITY	CURRENT		WT.
					(<i>nl/min</i>)		(<i>nl/min</i>)	50Hz	60Hz	
PI-20S	80mm(3")	200W	1 phase 100V	1.5m	0.35	2.6m	0.5	6.0A		16kg
								4.9A		
PI-20	80mm(3")	200W	3 phase 200V	1.5m	0.35	2.6m	0.5	1.5A		16kg
								1.2A		

